

# Product Data Sheet

## LED Inground Uplight

Supplied Less Driver



- Suitable for wet areas such as swimming pools
- Housing and junction box in high resistant technopolymer with double gasket seal
- Stainless steel bezel and screws with opal shockproof polycarbonate diffuser with static impact resistance of up to 1000kgs
- Non-serviceable maintenance free Osram LED with total power consumption of 1.4W



### Materials

Round and square stainless frame and screws.

Opal shockproof polycarbonate diffuser, unalterable and resistant to loads up to 1000 kg.


A double EDPM seal and stainless steel screws.

Led circuit boards

Housing and junction box in high-resistant technopolymer.

Double cable gland PG7 for through-wiring.

The housing has 2 holes (Ø 25 mm) for the entry of the supply cable. Its bottom has holes to allow drainage.

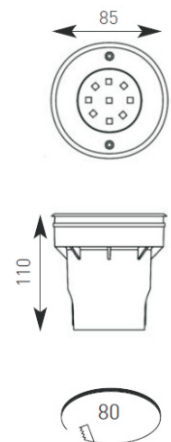

Code	Lamp	Description
AW0/9LED/WHI	LED	9 LED - Cool White
AW0/9LED/BLU	LED	9 LED - Blue



Accessories ATX10W/LED 10W 24V LED Driver (see page 94)