


# Product Data Sheet

## MR16/ GU10 Inground Uplight

Supplied Less Lamp



- Supplied with both MR16 and GU10 lampholders
- Compact inground uplight which accepts 12V and mains halogen, CFL and LED lamps
- Housing in die-cast aluminium with clear toughened glass diffuser of 10mm thickness
- 316 stainless steel top ring and stainless steel allen key screws
- Suitable for light vehicular traffic with a static impact resistance of up to 2000kgs
- Supplied with recessed sleeve in high resistant thermoplastic

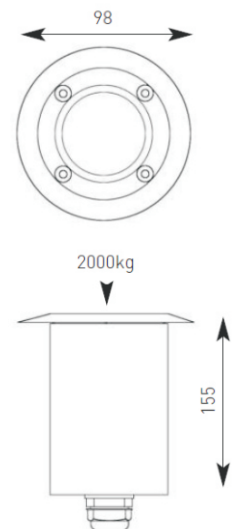

**Caution:** surface glass temperature will get very hot under normal halogen operation. It is recommended to use GU10 CFL or LED lamps for cooler operation.

| Code  | Lamp      | Description |
|-------|-----------|-------------|
| AW050 | MR16/GU10 | 50W         |

**Accessories** ATX20/60/IP68 IP68 20/60Va Electronic Transformer

| GU10 LED and CFL Options |           |
|--------------------------|-----------|
| Philips                  | Megaman   |
| 3W LED 50                | 9W CFL 50 |
| 56                       | 76        |
| Maximum size and wattage |           |

CE F IP67